

threshold
technology



ALUMASTER MPI – MAGNETIC ZERO THRESHOLD FOR PIVOT DOORS

New 2026

- Air permeability: Class 4 (EN 12207)
- Water tightness: Class 7B / 4A (EN 12208)
- Wind load resistance: Class C4 (EN 12210)

Test parameters (ITT) – wooden pivot doors


- **NO THRESHOLD MILLING REQUIRED**
faster and easier installation
- **MODULAR DESIGN**
easily adapts to various solutions and installation conditions.
- **COMPLETE SEAL**
lower and upper sealing system with easy-to-process elements.
- **BETTER THERMAL INSULATION**
profiles with thermal breaks.




outside

inside



MPI 10/1
with two short ramp profiles
G1

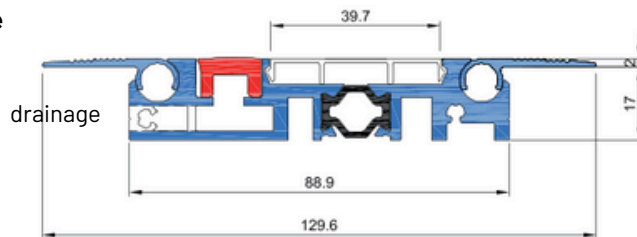

MPI 10/2
with two short ramp profiles
G2

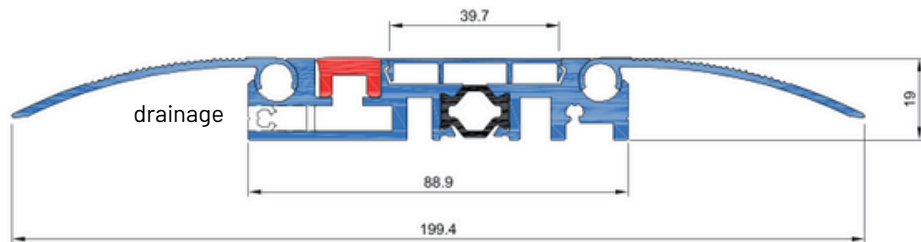

MPI 10/3
with one short ramp profile G1
and one long ramp profile G2,
variants for outward- or
inward-opening doors.

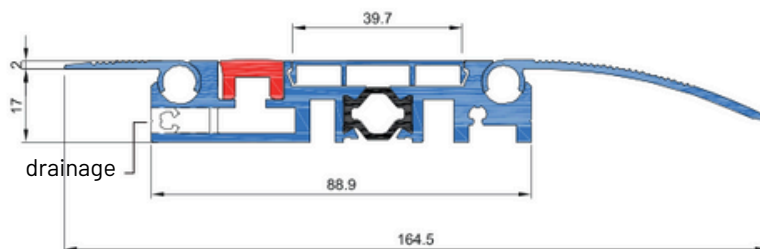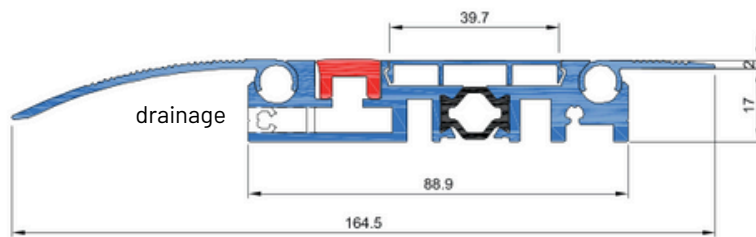

PLEASE CONTACT US



tel. +48 56 623 13 23
alumaster@alumaster.pl



Alumaster Polska Sp. z o.o.
Street Towarowa 7
87-100 Toruń, Poland